



APPLICATIONS

- Elevators
- Lifting machines
- Industry applications

TECHNICAL SPECIFICATIONS

- Change over contact
- Max Contact Rating: 30VA
- Max Switching Voltage: 200VDC / 200VAC
- Max Switching Current: 1A

TECHNICAL FEATURES

- Min insulation resistance: 10^9 Ohm
- Typ. resonant frequency: 2000Hz
- Working temperature: -30C to 90C

SPECIFICATIONS OF MATERIAL

- Housing material: P.A.
- Cable material: PVC / Cable section: 2x0.50mm²
- Cable length: 850mm or 2000mm


MS11 30 1A

DRAWINGS

ANALYSIS LTD



PROXIMITY MAGNETIC SWITCH MS11 30 1A (CHANGE OVER CONTACT)

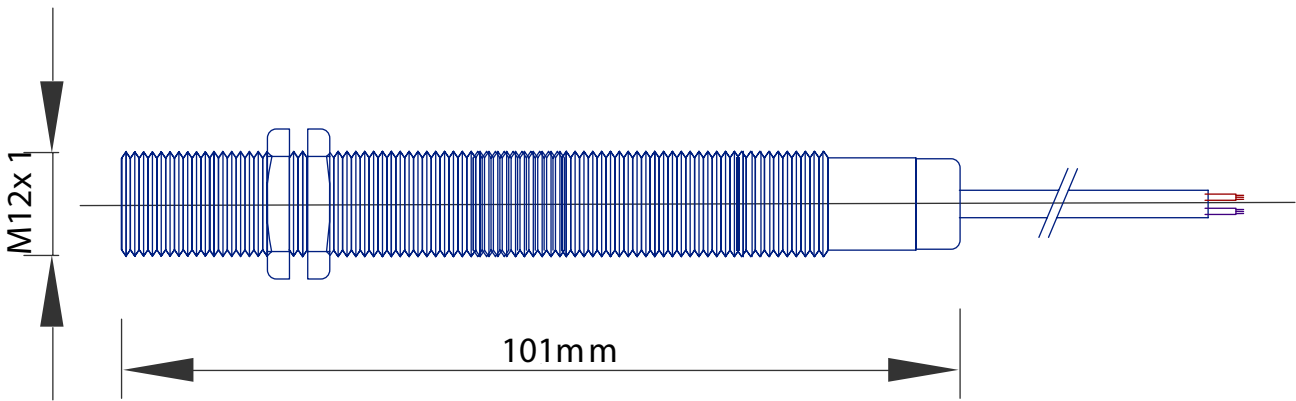


MS11 30 1A

ELECTRICAL CONNECTION


ANALYSIS LTD



CHANGE OVER CONTACT

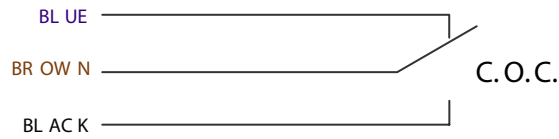

OPERATION DISTANCES OF MS11 30 1A C.O.C. FROM PLASTOFERITTE WITH DIMENSIONS 200x20x6mm

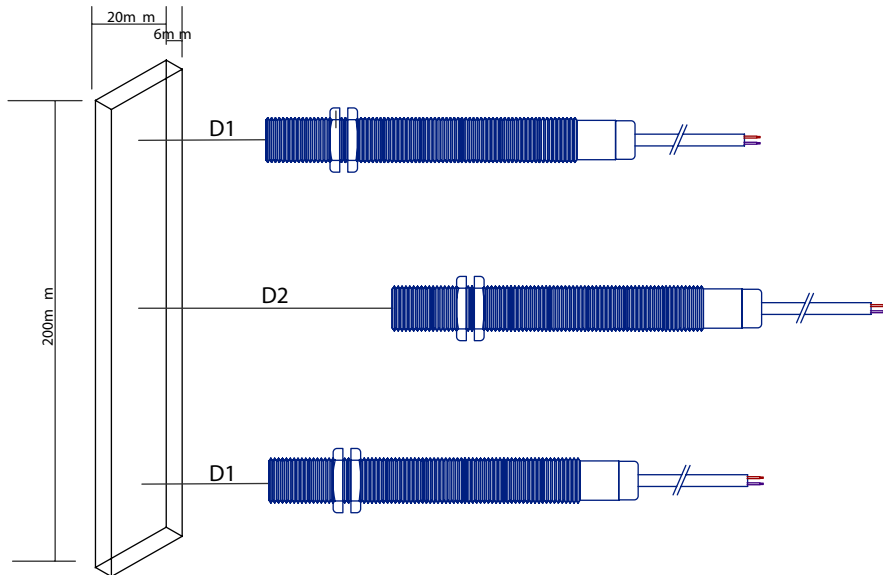

D1: from 9mm to 14mm
D2: from 19mm to 24mm

MS11 30 1A

ORDER CODE

ANALYSIS LTD



ORDER CODE FOR M11 30 1A C.O.C.

PROXIMITY MAGNETIC SWITCH MS11 30 1A COC
LENGTH OF CABLE

850mm	850
2000mm	2000

ORDERING EXAMPLE: MS11 30 1A-850

Delta Velestino, 375 00 Magnesia, Greece tel. 0030 2425024248

www.analysis-ltd.com.gr

Version: MS11301A.1.19-02-17

Analysis Ltd can accept no responsibility for errors in datasheets, catalogues and other electronic or printed materials. Analysis Ltd reserves the right to change specifications without notice. All trademarks in this material are property of Analysis Ltd. Copyright© 2017 Analysis Ltd. All rights reserved.



Analysis Ltd applies a certified ISO: 9001 quality management system.

Certificate No: PIR6046243