



APPLICATIONS

Elevators
Lifting machines
Industry applications

TECHNICAL SPECIFICATIONS

Bistable
Max Contact Rating: 120VA
Max Switching Voltage: 250VDC / 250VAC
Max Switching Currnt: 3A

TECHNICAL FEATURES


Min insulation resistance: 10^{10} Ohm
Typ. resonant frequency: 120Hz
Working temperature: -30C to 90C

SPECIFICATIONS OF MATERIAL

Housing material: P.A.
Cable material: PVC / Cable section: 2x0.50mm²
Cable length: 850mm or 2000mm



PROXIMITY MAGNETIC SWITCH MS12 120 3A (BISTABLE)

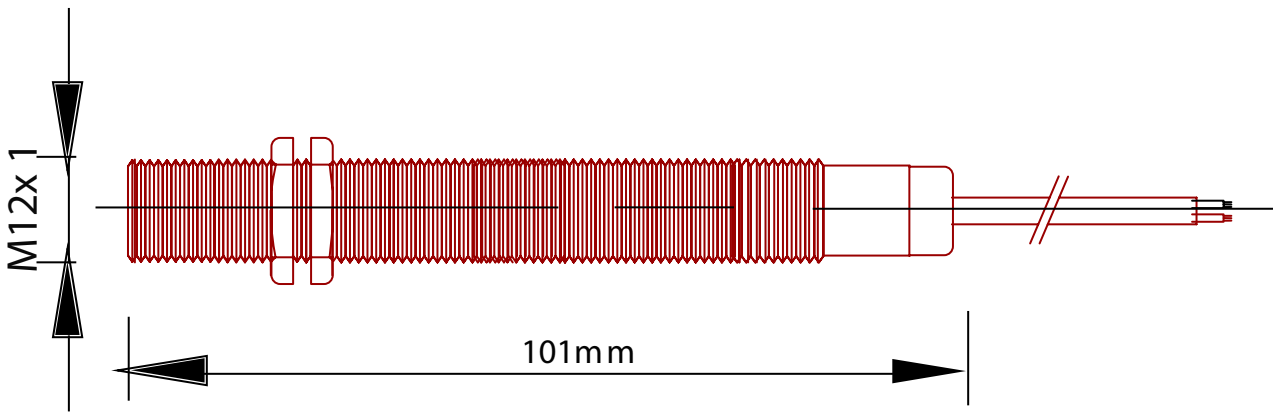



MS12 120 3A
BISTABLE

ELECTRICAL CONNECTION


ANALYSIS LTD



BISTABLE

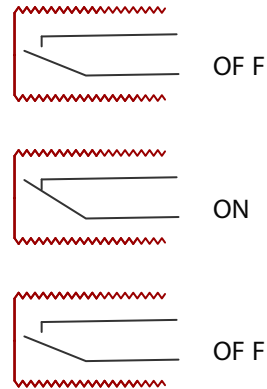

OPERATION DISTANCES OF MS12 120 3A BISTABLE FROM PLASTOFERITTE WITH DIMENSIONS 80x20x6mm

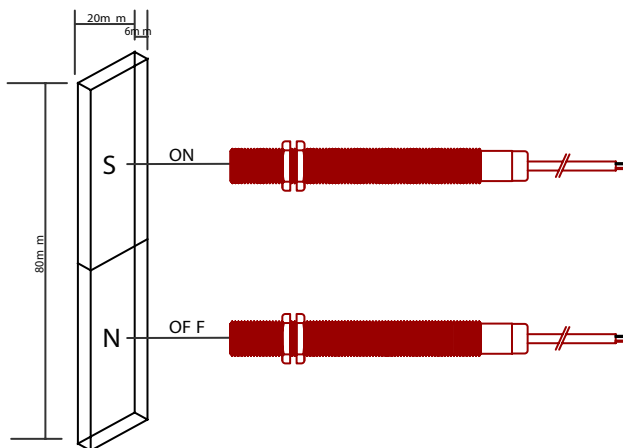

ON: from 20mm to 24mm
OFF: from 20mm to 24mm

MS12 120 3A
BISTABLE

ORDER CODE

ANALYSIS LTD



ORDER CODE FOR MS12 120 3A BISTABLE

PROXIMITY MAGNETIC SWITCH MS12 120 3A BISTABLE
LENGTH OF CABLE

850mm
2000mm

850
2000

ORDERING EXAMPLE: MS12 120 3A-850

Delta Velestino, 375 00 Magnesia, Greece tel. 0030 2425024248

www.analysis-ltd.com.gr

Version: MS12120.1.19-02-17

Analysis Ltd can accept no responsibility for errors in datasheets, catalogues and other electronic or printed materials. Analysis Ltd reserves the right to change specifications without notice. All trademarks in this material are property of Analysis Ltd. Copyright© 2017 Analysis Ltd. All rights reserved.



Analysis Ltd applies a certified ISO: 9001 quality management system.

Certificate No: PIR6046243