


P7S-CL

PRESSURE SWITCH

ANALYSIS LTD

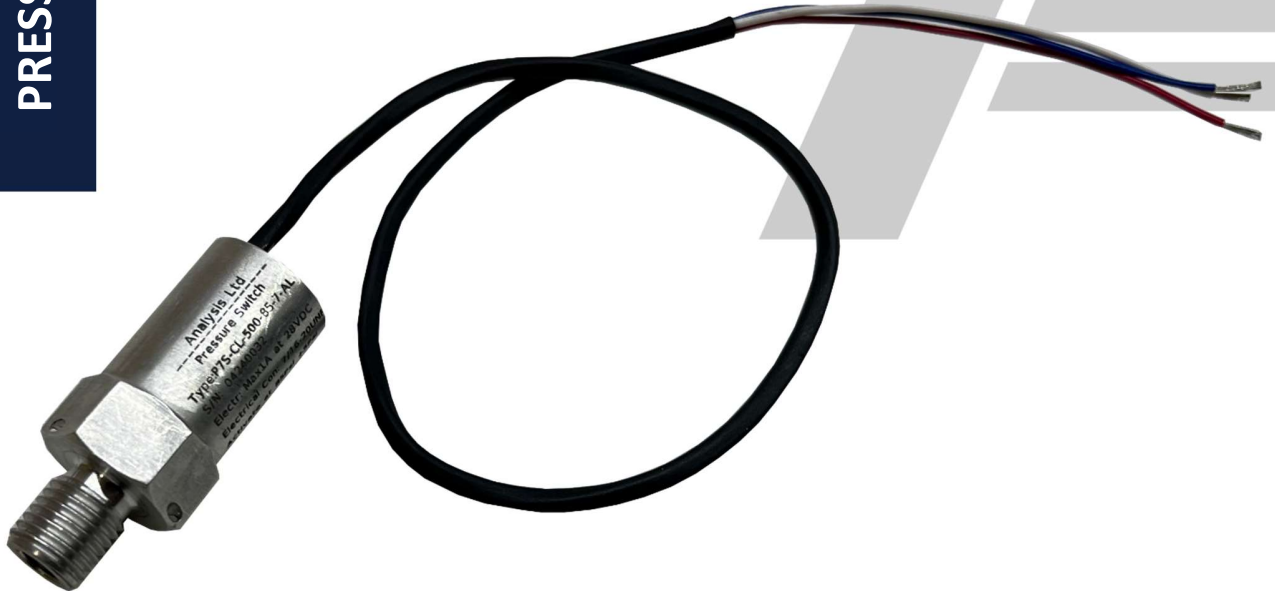

APPLICATIONS

Defense
Marine
Industrial
Dehumidifier
Pneumatic
Hydraulic

Connection

Thread mounting male or female
Cable version PCV cable other on request
Cable length on request
Change over switch

SPECIFICATION

Snap action switch
Spring loaded mechanism
Electrical Rating 24VDC, 1A
Aluminum body
Teflon membrane
Electrical connection hermetically sealed
Gauged vented switch
Operating pressure from 20 psig to 100psig
Accuracy ± 3 psig
Proof pressure 300 psig
Operating temperature ambient -40C to 70C
Operating temperature media -40C to 70C


Delta Velesino, 375 00 Magnesia, Greece tel. 0030 2425024248

Analysis Ltd can accept no responsibility for errors in datasheets, catalogues and other electronic or printed materials. Analysis Ltd reserves the right to change specifications without notice. All trademarks in this material are property of Analysis Ltd. Copyright© 2017 Analysis Ltd. All rights reserved.

P7S-CL

ORDER CODE

ANALYSIS LTD

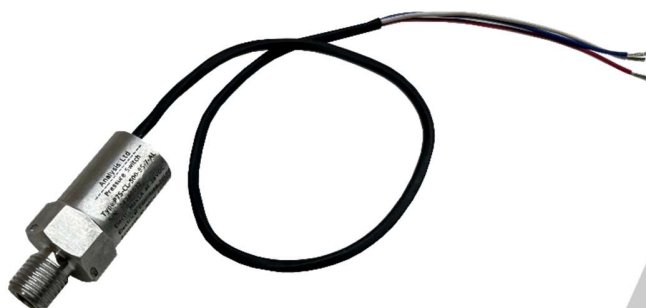

ORDER CODE FOR – P7S

Electrical connection - cable version

PVC	CL-P						
PTFE	CL-F						
Other on request	CL-X						

Cable Length

250mm		25					
Other on request		X					

Output

Change over switch			C				
Other on request			X				

Activate pressure

75psig				75			
Other on request				X			

Deactivate pressure

45psig					45		
Other on request					X		

Process connection

7/16"-20 UNEF						7U	
Other on request						X	

Body Material

Aluminum 6068							A6
Other on request							X

Delta Velestino, 375 00 Magnesia, Greece tel. 0030 2425024248

Analysis Ltd can accept no responsibility for errors in datasheets, catalogues and other electronic or printed materials. Analysis Ltd reserves the right to change specifications without notice. All trademarks in this material are property of Analysis Ltd. Copyright© 2017 Analysis Ltd. All rights reserved.